



LITE *Prem 100* **DATASHEET**

Service . Range . Knowledge


LITE Prem

The Lite Prem is one of the most adaptable drainage systems on the market since it is durable, flexible, and lightweight. There are many alternatives for your projects thanks to the 10+ grating options allowing for up to C250 loading capacity.




Depth Options


65mm Depth

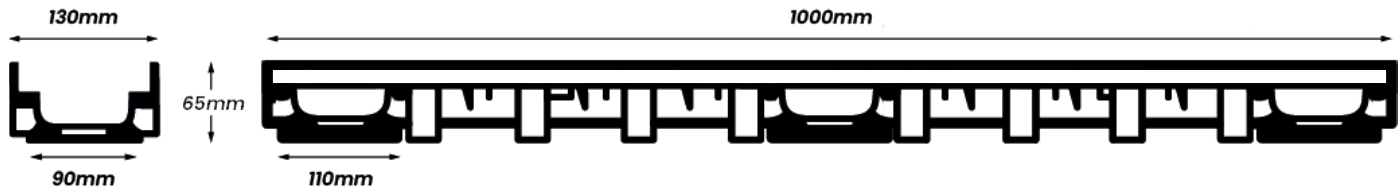

100mm Depth

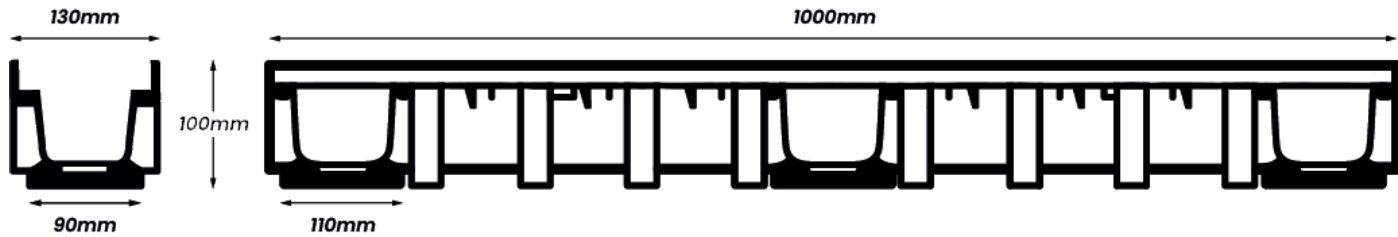

150mm Depth

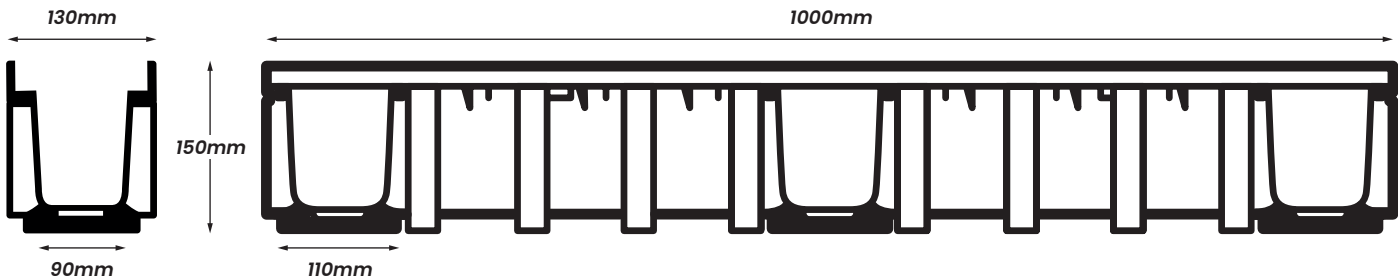

Reference	Description	Length	Internal Width	Overall Width	Overall Depth(Ht)
LITE.P.65	LITE PREM 65mm Depth	1000mm	90mm	130mm	65mm
LITE.P.100	LITE PREM 100mm Depth	1000mm	90mm	130mm	100mm
LITE.P.150	LITE PREM 150mm Depth	1000mm	90mm	130mm	150mm


DATA SHEET

Accessories



Reference	Height (mm)	Invert Height	Overall Width	Weight (KG)	Load Class	Outlet Inv. Height	Outlet
LITE.P.100.SUMP	280	260	130	1.2	A,B,C	250	110
LITE.P.100.EC	150	n/a	130	0.4	A,B,C	n/a	110
LITE.P.100.O	150	n/a	130	0.6	A,B,C	n/a	110
LITE.P.100.FAT	90	n/a	85	0.4	A,B,C	n/a	110
LITE.P.100.BB	11	n/a	95	0.1	A,B,C	n/a	n/a

Grating

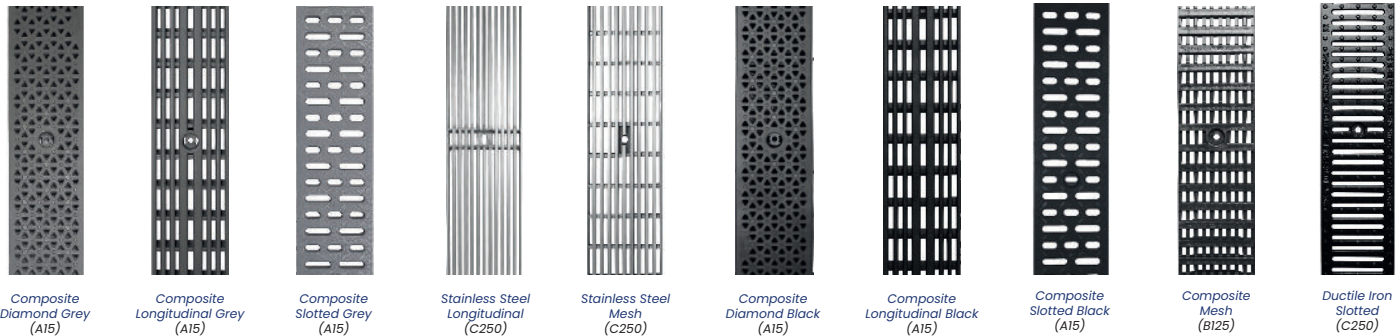

Reference	Description	Length (mm)	Slot Width	Overall Width	Load Class	SafeHeel
GR.100.D.C.B	Composite Diamond Black	1000	6mm	123mm	A15	✓
GR.100.D.C.G	Composite Diamond Grey	1000	6mm	123mm	A15	✓
GR.100.L.C.B	Composite Longitudinal Black	1000	7mm	123mm	A15	✓
GR.100.L.C.G	Composite Longitudinal Grey	1000	7mm	123mm	A15	✓
GR.100.S.C.B	Composite Slotted Black	1000	10mm	123mm	A15	×
GR.100.S.C.G	Composite Slotted Grey	1000	10mm	123mm	A15	×
GR.100.M.C	Composite Mesh	500	7mm	123mm	B125	✓
GR.100.P.SS	Stainless Steel Longitudinal	1000	6mm	123mm	C250	✓
GR.100.M.SS	Stainless Steel Mesh	1000	6mm	123mm	C250	✓
GR.100.S.DI	Ductile Iron Slotted	500	8mm	123mm	C250	✓



Polycon Surface Water Drainage

**Widnes Business Park
Foundry Lane
Widnes
Cheshire
WA8 8UB**

**www.polycon.co.uk
0151 422 9747
sales@polycon.co.uk**

Service . Range . Knowledge