Patented Lift Out Hinge





FULLY OPEN TO 135° FOR SAFE ACCESS



OPEN COVER TO 90°

BENEFITS


- Patented unique design features; Vertical drop-in covers providing 135° hinging giving superior site safety and one man operation for the majority of sizes
- Option to remove covers completely provides additional safety for man entry requirements



LIFT TO REMOVE

D400KM DUCTILE IRON HINGED MULTI-PART TRIANGULAR COVER & FRAME



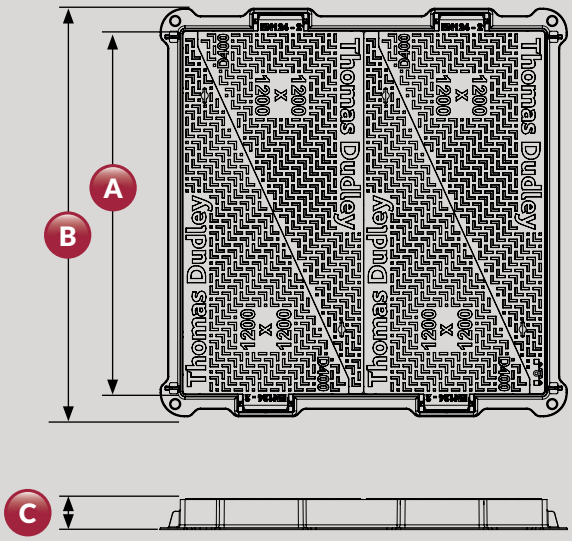

KEY FEATURES

- COMPLIES WITH BS EN 124-2
- SLIP RESISTANT
- LOAD RATED TO D400
- KITEMARKED
- PATENTED LIFT OUT HINGE

BENEFITS

- Complies fully with BS EN 124-2:2015 - suitable for intensity of traffic in Class D400 applications
- Engineered from quality assured ductile iron
- Unique, slip resistant Thomas Dudley tread pattern
- Hinged Double triangular non-rock cover
- Sequential opening with single locking point as standard
- Lift out covers providing 135° hinging giving superior site safety and one man operation

CLEAR OPENING (A) MM	OVER FRAME (B) MM	DEPTH (C) MM	CODE
900 x 600	1050 x 755	100	375109
900 x 600	1050 x 755	150	375443
1000 x 1000	1150 x 1150	100	330931
1200 x 900	1350 x 1050	100	330932
1200 x 1200	1350 x 1350	100	330933
1220 x 675	1370 x 825	100	330942
1220 x 675	1370 x 825	150	330943
1200 x 750	1350 x 902	100	372757
1500 x 1500	1655 x 1650	100	378658